



1.0 Features

- Display: 40 Char. X 2 Lines with 5X7 Dots
- Driver Mode: 1/16 Duty; 1/5 Bias
- Display Mode: Reflective / Transflective / Transmissive Type Optional; Positive; Normal / Wide Temp. Optional
- Assembly: SMT
- Backlight: EL / LED Optional

2.0 External Dimensions

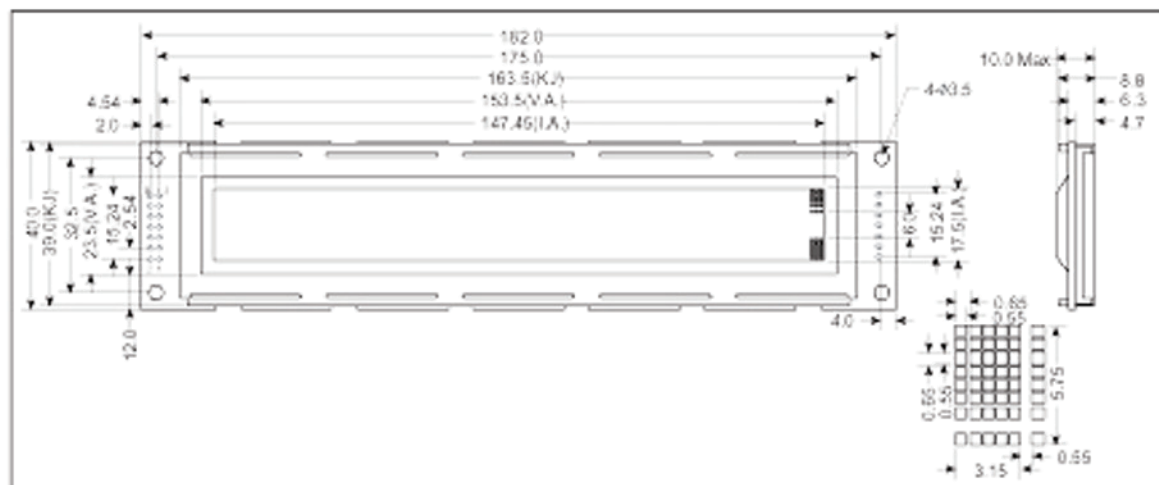

3.0 Logic Diagram

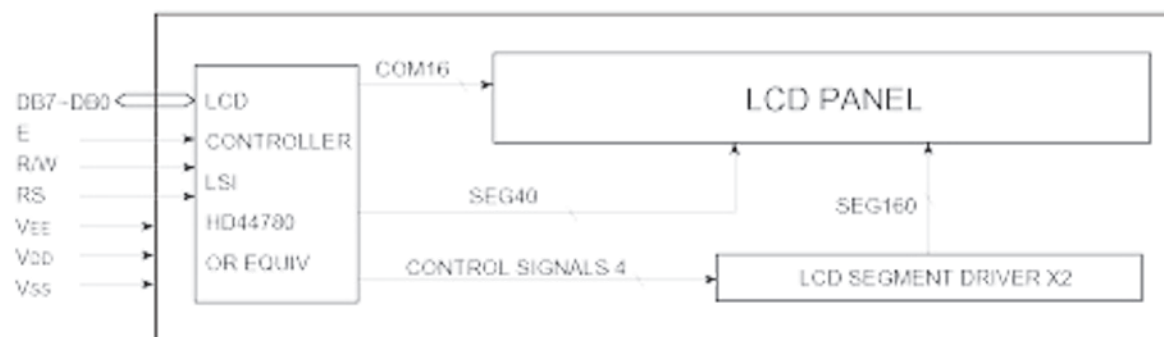

4.0 I/O Connection

Pin No.	Symbol	Function	Pin No.	Symbol	Function
1	V _{SS}	Signal Ground(GND)	8	DB1	Data Transport 1
2	V _{DD}	Power Supply Voltage (+5V)	9	DB2	Data Transport 2
3	V _{EE}	Power Supply for Driving LCD	10	DB3	Data Transport 3
4	RS	Register Selecting	11	DB4	Data Transport 4
5	R/W	Read or Write Selecting	12	DB5	Data Transport 5
6	E	Enable Signal	13	DB6	Data Transport 6
7	DB0	Data Transport 0	14	DB7	Data Transport 7